Secure Safe Castelle

for the protection of cash and valuables

The Secure Safe Castelle is designed to protect high-value items and cash within the home or business environment. The safe offers a high level of protection and is tested and certified according to EN 1143-1 Grade I.

Models

The Secure Safe Castelle is available in five sizes. Each size has the option of either key locking or user-friendly electronic locking.

Construction

The walls of the Secure Safe Castelle contain a special barrier designed to resist the effects of drills, hammers, chisels and cutting equipment and have an overall thickness of 45mm. The door is constructed from 8mm steel plate together with strengthening plates and has specially hardened anti-drill plates protecting the lock, bolts and boltwork. The door is secured by a three-way moving bolt mechanism. The door has three horizontal bolts and two sets of vertical bolts, with two bolts operating upwards and two downwards. All the bolts are chrome-plated and measure 25mm in diameter.

Locking

All models are available with EN 1300 certified locks, with the option of either a double-bitted key lock or a user-friendly electronic lock.

Additional features

The safes can be anchored using the fixing kit supplied. In addition, the larger sizes come with a removable shelf.

Design

The Secure Safe Castelle range has a two-tone powder finish with a light-grey door and dark-grey body.




42



Secure Safe Castelle

Models

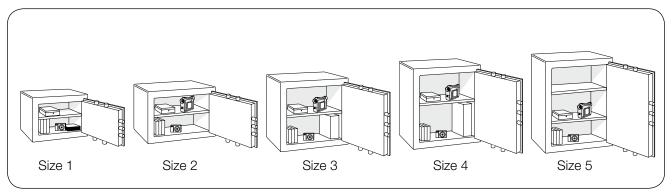

Product data

Key lock

Model	Article No.	External dimensions (mm)			Internal dimensions (mm)			Volume	Weight
		Height	Width	Depth	Height	Width	Depth	(litres)	(kg)
SSC-1K	SL02710	280	370	350	190	280	250	13	38
SSC-2K	SL02711	330	450	400	240	360	300	26	53
SSC-3K	SL02712	450	450	400	360	360	300	39	66
SSC-4K	SL02713	570	450	400	480	360	300	52	79
SSC-5K	SL02714	690	450	400	600	360	300	65	92

Electronic lock

Model	Article No.	External dimensions (mm)			Internal dimensions (mm)			Volume	Weight
		Height	Width	Depth	Height	Width	Depth	(litres)	(kg)
SSC-1E	SL02810	280	370	350	190	280	250	13	38
SSC-2E	SL02811	330	450	400	240	360	300	26	53
SSC-3E	SL02812	450	450	400	360	360	300	39	66
SSC-4E	SL02813	570	450	400	480	360	300	52	79
SSC-5E	SL02814	690	450	400	600	360	300	65	92

SecureLine policy is one of constant improvement. The above specification may therefore be altered without prior notification.

www.secure.line.net

Authorised dealer:



SLGB.7005.R1